

Installation instructions **DUPLEX**

Installation steps



1. Fastening to stud wall frame members

Fastening of membranes to metal frame members on stud wall and ceiling structures.

Roll out DUPLEX and rub firmly onto the subsurface using PRESSFIX.



2. Cut the liner with a utility knife



3. Remove the liner




4. Roll out the membrane

... and press it onto the adhesive tape.

Stick the membrane, ensuring that there are no folds or tension.



5. Rub using the PRESSFIX application tool to secure.

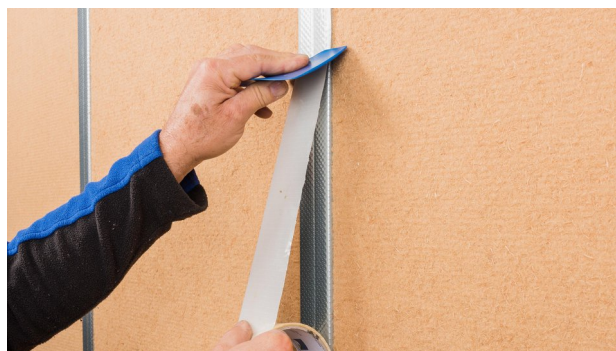

6. DUPLEX is also available in a width of 4 cm (1 5/8").

Substrates

Clean subsurfaces before applying tape. Adhesion is not possible on frozen surfaces. There must be no water-repellent substances (e.g. grease or silicone) on materials to be bonded. Subsurfaces must be sufficiently dry and stable.

Permanent adhesion is achieved on all pro clima interior and exterior membranes, on other vapour-check and airtight membranes (e.g. those made of PE, PA, PP and aluminium) and on other underlay and wall lining membranes (e.g. those made of PP and PET). Bonding and joints are possible with planed and painted wood, hard plastics and metal (e.g. pipes, windows etc.) and hard wood-based panels (chipboard, OSB and plywood panels).

The best results in terms of reliability are achieved on high-quality subsurfaces. It is your responsibility to check the suitability of the subsurface; adhesion tests are recommended in certain cases. Pretreatment with TESCON PRIMER is recommended in the case of subsurfaces that have insufficient stability.

General conditions

Taped joints must not be subjected to tensile forces. Press firmly to secure the adhesive tapes in place. Ensure that there is sufficient resistance pressure. Windproof, airtight or rainproof bonding can only be achieved on vapour-check or underlay/facade membranes that have been installed without folds or creases. Ventilate continuously and systematically to prevent build-up of excessive humidity; use a dryer if necessary.

The information provided here is based on practical experience and the current state of knowledge. We reserve the right to make changes to the recommended designs and processing or to make alterations due to technical developments and associated improvements in the quality of our products. We would be happy to inform you of the current technical state of the art at the time you use our products.

Further information about the application and construction can be found in the pro clima planning documentation. For queries please call the pro clima technical hotline on +49 (0)6202 278245.

MOLL

bauökologische Produkte GmbH

Rheintalstraße 35 - 43

D-68723 Schwetzingen

Fon: +49 (0) 62 02 - 27 82.0

eMail: info@proclima.de